
### Nordic Warmth, Universal Safety

Aduro Bio Fireplaces



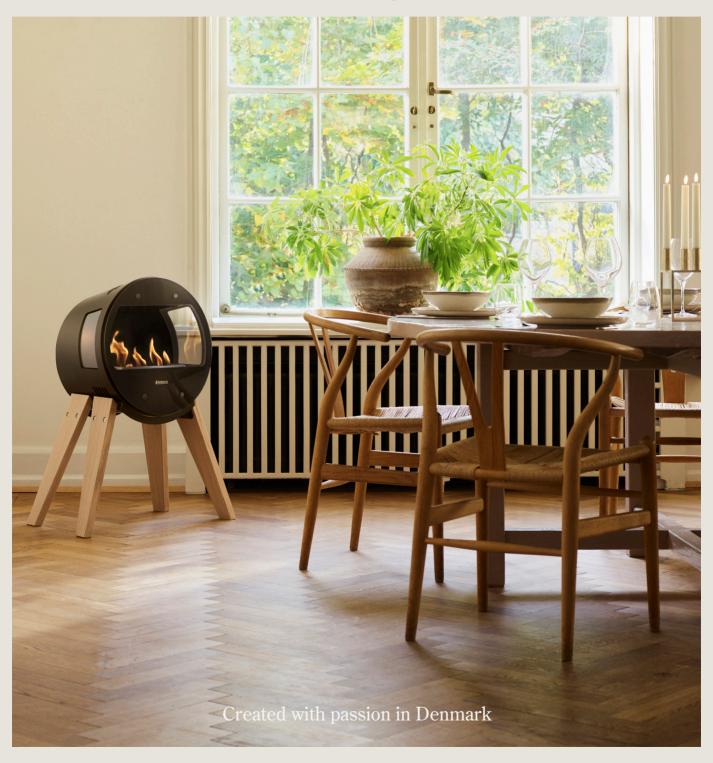


## Real Fire. True *Comfort*

Invite warmth into your home with Aduro Bio Fireplaces. Simple. Timeless. Safe.

- Works in any room, inside or out
- No chimney or electricity required
- Safe refilling and operation with Aduro Bio-Safe
  - Pleasant warmth up to 1.8  $3~\mathrm{kW}$ 
    - Timeless Danish design



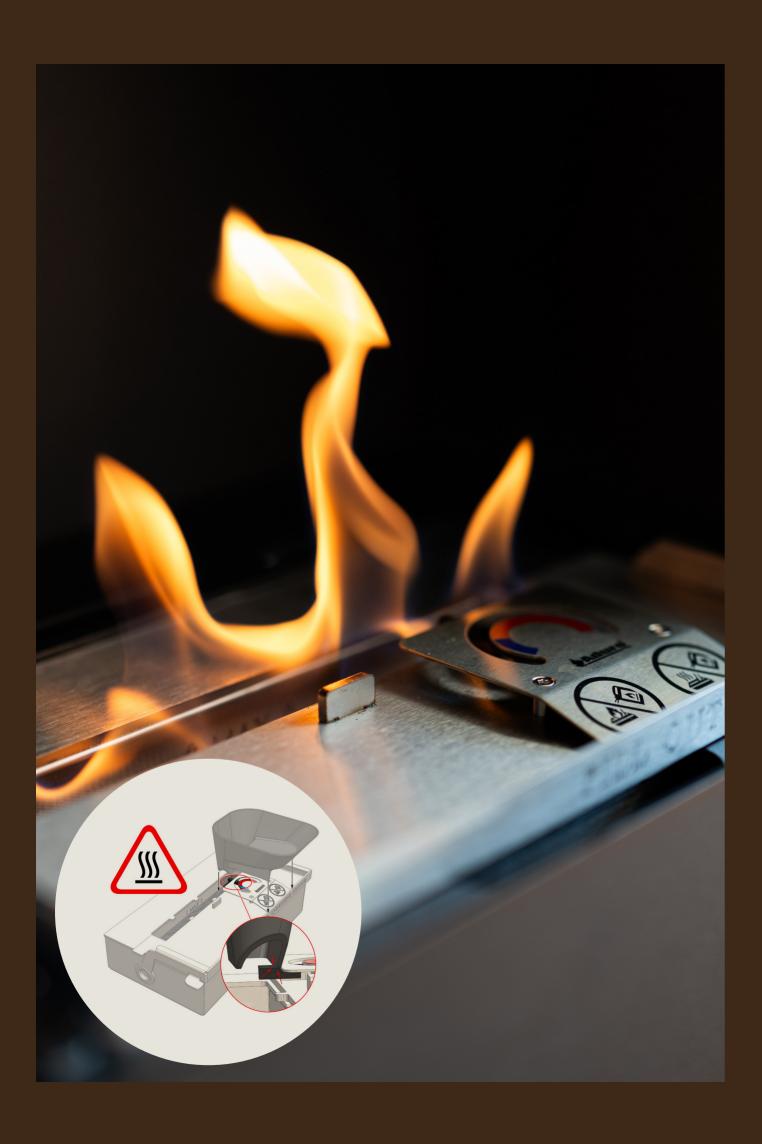

# Real fire without the worries


Your safety is our top priority. Designed for easy refilling and safe ignition, our patent-pending Aduro Bio-Safe system prevents refueling when the fireplace is hot. When the fireplace is about 40°C, a heat sensitive spring blocks the funnel from being attached. The fireplace's burner is equipped with ceramic fibers that absorb bioethanol like a sponge, making it easy and safe to ignite.

With the included funnel, made from recycled plastic, refueling is simple.



# Meet the designer. Casper Storm





Aduro's Bio Fireplaces were designed in collaboration with industrial designer *Casper Storm*. For 20 years, Storm's Nordic sensibility has helped Aduro bring simplicity into focus. Effortlessly marrying form and function, Storm's designs bring elegance and ease to every home's fireplace.







Oak Wood Legs

B1. Bio Fireplace



#### Wall Bracket





## Make it yours

Marrying elegant simplicity with customizable accessories, our Bio Fireplaces fit effortlessly into any space and compliment your personal style. With two fireplace models and three mounting options, make your Bio Fireplace uniquely yours.

B2. Bio Fireplace Read more on adurofire.com





## Specifications For the B1 & B2 Bio Fireplace

Measurements (Ø x H x D)	48 x 47.65 x 35.05 cm
Weight, fireplace	26 kg
Distance to combustible material - Behind	2 cm (does not apply to wall–mounting)
Distance to combustible material - To the side	15 cm
Distance to combustible material - Above	20 cm
Distance to combustible material - In front	75 cm
Wall bracket	If the fireplace is to be mounted on the wall, it must be installed on a non-flammable wall.
Material, fireplace and burner	Black powder-coated steel / 4 mm ceramic glass (B1) / Brushed stainless steel
Material, funnel	Recycled plastic from Danish households
Capacity, burner	1.2 L (we recommend 1 L)
Heat efficiency	1.8 – 3 kW
Burn time	3 – 4 hours
Minimum room size	80 m <sup>3</sup>
Recommended bioethanol	Bioethanol (UN:1170, 93 – 96.5 %)
Tested and certified according to European standard EN16647:2015	

Read more on adurofire.com

# The *colors* of home

Our gallery of spaces imagines our Bio Fireplace in different rooms. No matter the palette of your home, your Bio Fireplace will enhance your personal style.

Share images. Spark inspiration.

Tag us on Instagram to share the warmth.

@aduro\_stoves

















Aduro A/S Beringvej 17 DK-8361 Hasselager